

**FCC / IC**

**En**

This device complies with part 15 of the FCC and Industry Canada license-exempt RSS standards. Operation is subject to the following two conditions:  
 (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**FCC NOTE:** The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
 — Reorient or relocate the receiving antenna.  
 — Increase the separation between the equipment and receiver.  
 — Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
 — Consult the dealer or an experienced radio/TV technician for help.

**Important note:** To comply with the FCC RF exposure compliance requirements, no change to the antenna or the device is permitted. Any change to the antenna or the device could result in the device exceeding the RF exposure requirements and void user's authority to operate the device.

**Fr**

Cet appareil est conforme au paragraphe 15 des normes FCC et au CNR pour les appareils exempts de licence d'industrie Canada. Son utilisation est soumise aux deux conditions suivantes:  
 1) cet appareil ne doit pas occasionner de brouillage préjudiciable et 2) cet appareil doit accepter toutes les interférences reçues, notamment les interférences qui peuvent provoquer un fonctionnement non désiré.

**NOTE DE LA FCC :** Le fabricant n'est pas responsable des interférences sur les fréquences radioélectriques ou télévisuelles pouvant être causées par des modifications non autorisées de ce matériel. De telles modifications peuvent annuler le droit de l'utilisateur à utiliser cet appareil.

**REMARQUE :** Cet appareil a été testé et trouvé conforme aux limites relatives aux appareils numériques de catégorie B définies dans le paragraphe 15 des normes FCC. Ces limites ont été définies afin de fournir une protection raisonnable contre le brouillage préjudiciable en milieu résidentiel. Cet appareil produit, utilise et peut émettre des ondes de fréquence radio et, s'il n'est pas installé et utilisé conformément aux instructions, il peut provoquer un brouillage préjudiciable aux communications radio. Il n'existe toutefois aucune garantie que des interférences ne se produiront pas au sein d'une installation donnée. Si cet appareil occasionne un brouillage préjudiciable à la réception radiophonique ou télévisuelle, il suffit d'ajuster et d'éteindre l'appareil pour déterminer sa responsabilité. Nous encourageons l'utilisateur à essayer de corriger ces interférences en appliquant une ou plusieurs des mesures suivantes:  
 — Réorienter ou déplacer l'antenne de réception.  
 — Augmenter la distance entre l'appareil et le récepteur.  
 — Brancher l'appareil à une prise secteur différente de celle du récepteur.

**REMARQUE importante :** Pour se conformer aux exigences de conformité de la FCC concernant l'exposition aux RF, aucune modification apportée à l'antenne ou au dispositif n'est autorisée. Toute modification apportée à l'antenne ou au dispositif pourrait faire en sorte que le dispositif dépasse les exigences d'exposition aux RF et pourrait annuler le droit de l'utilisateur à utiliser ce dispositif.

**Es**


Este dispositivo cumple con las Especificaciones del apartado 15 de las normas de la FCC y con las especificaciones de las normas radioeléctricas (RSS) del Ministerio de Industria de Canadá aplicables a aparatos exentos de licencia. El funcionamiento está sujeto a las siguientes dos condiciones: (1) este dispositivo no debe provocar interferencia perjudicial, y (2) este dispositivo debe aceptar toda interferencia que reciba, incluso la que pudiera causar un funcionamiento no deseado.

**NOTA DE LA FCC:** El fabricante no se hace responsable de ninguna interferencia de radio o TV ocasionada por modificaciones efectuadas a este equipo. Dichas modificaciones podrían anular la autoridad del usuario para utilizar el equipo.

**NOTA:** Este equipo ha sido probado y cumple con los límites para aparatos digitales de Clase B, de conformidad con el apartado 15 de las normas de la FCC. Estos límites están diseñados para proveer protección razonable contra interferencias perjudiciales en una instalación residencial. Este equipo genera, usa y puede irradiar energía de radiofrecuencias y, si no se instala y usa según las instrucciones, puede provocar interferencia perjudicial a las radiocomunicaciones. No obstante, no hay garantías de que no ocurrirá interferencia en una instalación en particular. Si este equipo provoca interferencia perjudicial a la recepción de radio o televisión, lo que puede determinarse encendiendo y apagando el equipo, se recomienda que el usuario intente corregir la interferencia por medio de la implementación de una o más de las siguientes medidas:  
 — Reorientar o reubicar la antena receptora.  
 — Incrementar la separación entre el equipo y el receptor.  
 — Conectar el equipo a un tomacorriente de un circuito diferente del circuito al que está conectado el receptor.  
 — Consultar al distribuidor o a un técnico con experiencia en radio/televisión para solicitar asistencia.

**Nota importante:** Para cumplir con los requisitos de cumplimiento de exposición de radiofrecuencia de la FCC, no se permiten cambios a la antena o el dispositivo. Cualquier cambio a la antena o dispositivo podría hacer que el dispositivo supere los requerimientos de exposición de radiofrecuencia y anular la autoridad del usuario para operar el dispositivo.

FCC — U22ZV3006A | IC: 6924A-ZW3006A  
 Jasco Products Company | Model: ZW3006 / 14299  
 CAN ICES-3(B) / NMB-3(B)

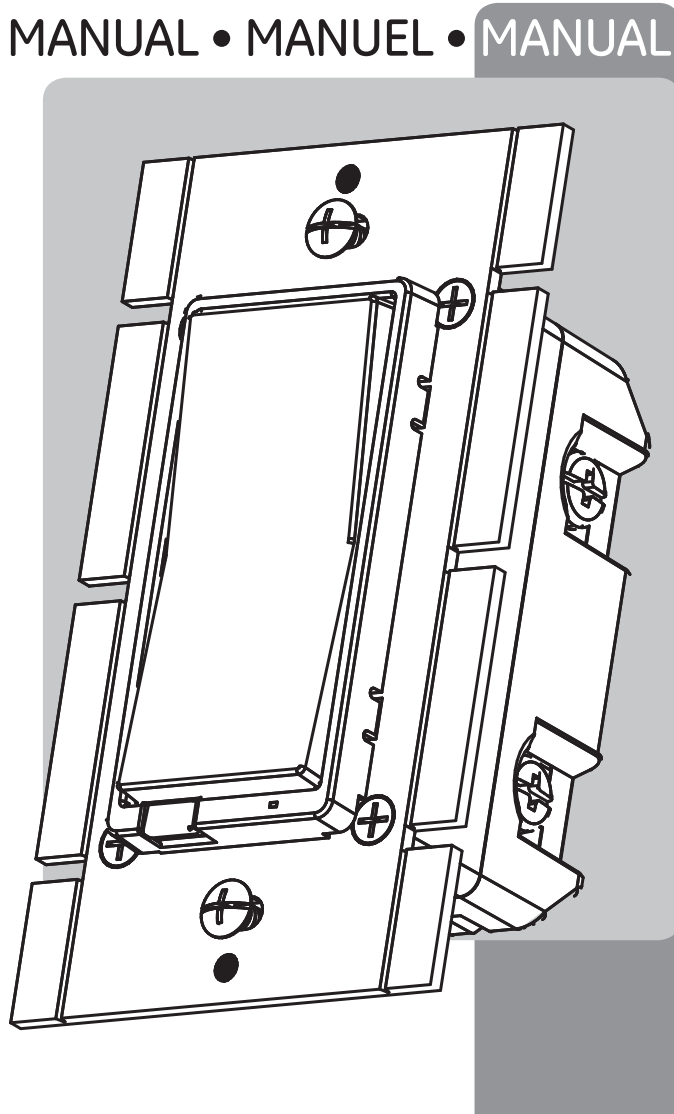

**STOP**

**DO NOT RETURN THIS PRODUCT TO THE STORE**  
**NE RETOURNEZ PAS CE PRODUIT AU MAGASIN**  
**NO DEVUELVA ESTE PRODUCTO A LA TIENDA**

If you have any problems or questions, contact our tech support team at: 1-800-654-8483, option 1 Monday-Friday, 7:30-5pm CST  
 For the most up-to-date product support, accessories, electronic (PDF) format manuals and more, visit [www.jascoproducts.com/support](http://www.jascoproducts.com/support).

• No user serviceable parts in this unit.  
 Si vous avez des problèmes ou des questions, communiquez avec notre équipe de soutien technique au 1-800-654-8483, option 1, du lundi au vendredi, de 7 h 30 à 17 h (HNC).  
 Pour le soutien relatif aux produits le plus à jour, les accessoires, les manuels en format électronique (PDF) et plus encore, visitez le site [www.jascoproducts.com/support](http://www.jascoproducts.com/support).

• Aucune des pièces de ce dispositif ne peut être réparée par l'utilisateur.  
 Si tiene problemas o dudas, comuníquese con nuestro equipo técnico al número: 1-800-654-8483, opción 1 de lunes a viernes, de 7:30 a 5 p.m., hora estándar del centro (CST).  
 Para recibir el soporte técnico más actualizado sobre productos, accesorios, manuales en formato digital (PDF), entre otros, visite [www.jascoproducts.com/support](http://www.jascoproducts.com/support).

• Esta unidad no contiene piezas que el usuario pueda reparar.

**WARRANTY**  
 JASCO Products warrants this product to be free from manufacturing defects for a period of two years from the original date of consumer purchase. This warranty is limited to the repair or replacement of this product only and does not extend to consequential or incidental damage to other products that may be used with this product. This warranty is in lieu of all other warranties, expressed or implied. Some states do not allow limitations on how long an implied warranty lasts or permit the exclusion or limitation of consequential damage, so the above limitations may not apply to you. This warranty gives you specific rights, and you may also have other rights which vary from state to state. Please contact Customer Service at 800-654-8483 (option 1) between 7:30AM - 5:00PM CST or via our website [www.jascoproducts.com](http://www.jascoproducts.com) if the unit should prove defective within the warranty period.

**GARANTIE**  
 JASCO Products garantit que ce produit est exempt de tout défaut de fabrication pour une période de deux ans à compter de la date de l'achat original par l'acheteur. Cette garantie se limite exclusivement à la réparation ou au remplacement de ce produit et n'est pas applicable aux dommages indirects ou accessoires survenus sur d'autres produits utilisés avec ce produit. Cette garantie se substitue à toute autre garantie expresse ou implicite. Certains États ne permettent pas de restrictions quant à la durée d'une garantie implicite ou permettent l'exclusion ou l'imposition de limitations de dommages indirects et accessoires, il se peut, par conséquent, que cette garantie ne s'applique pas dans votre cas. Cette garantie vous confère des droits juridiques précis; vous pouvez avoir d'autres droits qui peuvent varier d'un État à l'autre. Veuillez communiquer avec le service à la clientèle au 1-800-654-8483 (option 1) entre 7 h 30 et 17 h heure normale du Centre ou par l'intermédiaire de notre site Web ([www.jascoproducts.com](http://www.jascoproducts.com)) si l'appareil s'avère défectueux au cours de la période de garantie.

**GARANTÍA**  
 JASCO Products garantiza que este producto está libre de defectos de fabricación durante un periodo de dos años a partir de la fecha original de compra por parte del consumidor. Esta garantía se limita a la reparación o sustitución de este producto solamente y no se extiende a daños derivados o accidentales causados a otros productos que se usen con esta unidad. Esa garantía reemplaza a todas las demás garantías expresas o implícitas. Algunos estados no autorizan limitaciones en cuanto a la duración de una garantía implícita ni permiten la exclusión o limitación por daños accidentales o derivados, por lo tanto, puede que las anteriores limitaciones no apliquen en su caso. Esta garantía le da o usted derechos específicos, y otros que usted puede tener y que varían según el estado en el que usted reside. Si la unidad resultare defectuosa dentro del periodo de garantía, comuníquese por favor con Atención al Cliente en el 800-654-8483 (opción 1) entre 7:30 y 17 h, Hora del Centro, o a través de nuestro sitio de internet ([www.jascoproducts.com](http://www.jascoproducts.com)).

JASCO Products Company, Building B  
 10 E Memorial Rd, Oklahoma City, OK 73114

**SPECIFICATIONS**  
 ZW3006  
 Power: 120 VAC, 60 Hz  
 Signal Frequency: 908.4/916 MHz  
 Minimum Load: 40W, incandescent lamps only.  
 Maximum Load: 1000W, 2-gang 800W, and 3-gang 600W incandescent lamps only.  
 Wireless Range: Up to 150 feet line of sight from controller or closest Z-Wave receiver module.  
 Operating Temperature Range: 32-104° F (0-40° C)  
 For indoor use only.  
 Specifications subject to change without notice due to continuing product improvement.

**ESPECIFICACIONES**  
 ZW3006  
 Power: 120 VAC, 60 Hz  
 Signal Frequency: 908.4/916 MHz  
 Minimum Load: 40W, incandescent lamps only.  
 Maximum Load: 1000W, 2-gang 800W, and 3-gang 600W incandescent lamps only.  
 Wireless Range: Up to 150 feet line of sight from controller or closest Z-Wave receiver module.  
 Operating Temperature Range: 32-104° F (0-40° C)  
 For indoor use only.  
 Specifications subject to change without notice due to continuing product improvement.

**In-wall Wireless Smart Dimmer (1000w)**

**Montage mural Intelligent Gradateur sans fil (1000w)**

**Interruptor de pared reductor inalámbrico de luz inteligente (1000w)**

**SCAN TO VIEW INSTALLATION GUIDE**

Balayez ce code pour consulter le guide d'installation.

Escanear para ver la guía de instalación

124299  
 ZW3006

Z-Wave® Certified Wireless Lighting Control  
 Certifié Z-Wave Commande d'éclairage sans fil  
 Control inalámbrico para iluminación certificado por Z-Wave®

All brand names shown are trademarks of their respective owners.  
 Tous les noms de marque illustrés sont des marques de commerce de leurs propriétaires respectifs.  
 Todos los marcas que aparecen aquí son marcas registradas de sus respectivos dueños.

MADE IN CHINA/FABRIQUÉ EN CHINE/HECHO EN CHINA  
 GE IS A TRADEMARK OF GENERAL ELECTRIC COMPANY AND IS UNDER LICENSE BY  
 JASCO PRODUCTS COMPANY LLC,  
 10 E MEMORIAL RD.,  
 OKLAHOMA CITY, OK 73114.  
 © JASCO 2015 | 14299 | ZW3006 | rev. 11/10/15 RT

**1. Tools You Will Need**

**IMPORTANT!**  
 The fixture controlled by the Z-Wave In-wall Smart Dimmer must not exceed 1000 watts (incandescent). Not for use with CFL or LED lighting.

**Getting To Know Your New Z-Wave Device**

- Turn ON/OFF and adjust dim levels manually or remotely via the Z-Wave controller
- Can be Included in multiple Groups and Scenes
- May be used in single pole installation or with up to two Jasco Add-on switches in 3-way or 4-way wiring configurations
- Compatible with incandescent and halogen bulbs only
- Interchangeable Paddle switch — White & light almond paddle in package
- Uses a standard, decorative-size wall plate for single gang installations (wall plate not included)
- Blue LED indicates switch location in a dark room
- Z-Wave Certified for simple pairing and integrated home automation
- Screw Terminal Installation — requires wiring connections for Line (Hot), Load, Neutral, and Ground. Traveler wire required for 3-way or 4-way installation
- This device supports lifeline (association group 1)
- This Z-Wave device has advanced features that allow you to customize your experience. These features can only be adjusted by a Z-Wave enabled controller that support the Z-Wave Configuration command class. For a complete list of Adjustable Configurations, visit: [www.jascoproducts.com/z-waveconf](http://www.jascoproducts.com/z-waveconf)

**3.**

**OR**

**WARNING — SHOCK HAZARD**

Turn OFF the power to the branch circuit for the switch and lighting fixture at the service panel. All wiring connections must be made with the POWER OFF to avoid personal injury and/or damage to the switch.

This device is intended for installation in accordance with the National Electric Code and local regulations in the United States, or the Canadian Electrical Code and local regulations in Canada. If you are unsure or uncomfortable about performing this installation consult a qualified electrician.

**Multi-switch wiring**  
 For 3-way installations, please refer to Add-on Switch manual

**Single switch wiring**  
 Before you start, you may wish to change the paddle to match your wallplate or decor. Please proceed to section 5.

1. Shut off power to the circuit at circuit breaker or fuse box.
- IMPORTANT! Verify power is OFF to switch box before continuing.**
2. Remove wall plate.
3. Remove the switch mounting screws.
4. Carefully remove the switch from the switch box. DO NOT disconnect the wires. There are up to five screw terminals on the Dimmer; these are marked

A. LINE (Hot) — Black (connected to power)  
 B. NEUTRAL — White (this terminal is not used for the installation process)  
 C. LOAD — Black (connected to lighting)  
 D. GROUND — Green/Bare  
 E. TRAVELER — Red/Other (only in 3-way installations)

**Match these screw terminals to the wires connected to the existing switch.**

5. Disconnect the wires from the existing switch. Be careful to label wires according to the previous terminal connection.

**Observe Important Wiring Information**  
**IMPORTANT! This Dimmer is rated for and intended to only be used with copper wire.**

**Wire Gauge Requirements**  
 Use 14 AWG or larger wires suitable for at least 80° C for supplying Line (HOT), Load, Neutral, Ground and Traveler connections.

**Wire Strip Length**  
 For attachment to screw terminals: Strip insulation 1" (25mm)  
 For attachment using the enclosure's holes: Strip insulation 5/8" (16mm)  
 UL specifies that the tightening torque for the screws is 14 Kgf-cm (12 lbf-in).

1. Connect the green or bare copper ground wire to the GROUND terminal.
2. Connect the black wire that goes to the light to the terminal marked LOAD.
3. Connect the black wire that comes from the electrical service panel (HOT) to the terminal marked LINE.
4. Connect the white wire to the neutral terminal (use jumper wire [not included] if needed).

**NOTE: The Traveler terminal is only used for 3-way or 4-way wiring and should remain insulated if the switch is being installed in a 2-way system (one switch & one load).**

5. Insert Dimmer into the switch box being careful not to pinch or crush wires.
6. Secure the Dimmer to the box using the supplied screws.
7. Mount the wall plate.
8. Reapply power to the circuit of fuse box or circuit breaker and test the system.

**Basic Operation**  
 The connected light can be turned ON/OFF and adjust dim levels in two ways:  
 1. Manually from the front panel of the In-wall Dimmer  
 2. Remotely with a Z-Wave Controller

**Manual Control**  
 The Front Panel Rocker Dimmer allows the user to:  
 Turn ON/OFF the connected fixture.  
 To turn the connected fixture ON: Press and release the top of the rocker.  
 To turn the connected fixture OFF: Press and release the bottom of the rocker.

**Adjust Dim Level**  
 To increase brightness: press and hold the top of the rocker  
 To decrease brightness: press and hold the bottom of the rocker.

**2.**

A. Up — Press & release to turn Dimmer on, press & hold increases brightness  
 B. Down — Press & release to turn Dimmer off, press & hold to dim

C. Ground (Green/Bare)  
 D. Load (Black)  
 E. Line (Black)  
 F. Traveler (Red/Other)

**Single, Dual And Triple Gang Boxes**  
 When installing the In-wall Smart Dimmer in multiple gang boxes it may be necessary to break off one or both sides of the scored tabs on the front yoke. This will affect the electrical rating of the switch (see specifications for details).

**4.**

**Adding your device to a Z-wave network**

1. Follow the instructions for your Z-wave certified controller to include a device to the Z-wave network.
2. Once the controller is ready to include your device, press and release the top or bottom of the wireless smart switch(rocker) to include it in the network.

**Please reference the controller's manual for instructions.**  
 Now you have complete control to turn your fixture ON/ OFF/automate to groups, scenes, schedules and interactive automations programmed by your controller.  
 If your Z-wave certified controller features Remote Access, you can now control your fixture from your mobile devices.

**To remove and reset the device**

1. Follow the instructions for your Z-wave certified controller to exclude a device from the Z-wave network.
2. Once the controller is ready to Exclude your device, press and release the top or bottom of the wireless smart dimmer (rocker) to exclude it from the network.

**To return your switch to factory defaults:**  
 Quickly press ON (Top) button three (3) times then immediately press the OFF (Bottom) button three (3) times. The LED will flash ON/OFF 5 times when completed successfully.  
**Note: This should only be used in the event your network's primary controller is missing or otherwise inoperable.**

**5.**

**To Change Color Of The Paddle**  
 This step is optional. Before you start you may want to change the color of the paddle to match your wallplate or decor.

1. Lift the Air Gap tab at the base of the paddle.
2. Push side tabs in on one side and then the other to release paddle. Lift the cover up and off.
3. Simply put the new paddle onto the switch by inserting the air gap and side tabs and snapping securely into place.

Once this step has been completed please return to section 3.

**GE Add-on switch is required for Multi-Switch 3-way or 4-way installations.**  
 Connecting the traveler terminal of this switch to a standard, non-GE switch will cause damage or result in improper function. If this switch is a part of a 3-way or 4-way multi-switch installation, do not connect the traveler wire or apply power until GE Add-on switches are correctly installed. For more information on 3-Way or 4-Way installations, view the manual or quick-start guide that comes with the GE Add-on switch.

**Z-WAVE INTEROPERABILITY**  
 This product can be included and operated in any Z-Wave network with other Z-Wave certified devices from other manufacturers and/or other applications. All non-battery operated nodes within the network will act as repeaters regardless of vendor to increase reliability of the network.

This Device supports Lifeline (association group 1) supporting 1 node for lifeline communication. Group 1 must be assigned the Node ID of the primary controller where unsolicited notifications will be sent. The Z-Wave controller should set this association automatically after inclusion. Lifeline association only supports the "Device Reset Locally" function. Refer to the instructions of your controller for any available details on how this can be set.

## **Model: 14299 / ZW3006**

**This literature will be available on our quick start guide or on our website at the following address in the future: [www.jascoproducts.com/z-waveconfig](http://www.jascoproducts.com/z-waveconfig)**

### **ADVANCED OPERATION**

The following Advanced Operation parameters require that you have a controller that supports the advanced configuration command class.

#### **All On/All Off**

Depending upon your primary controller, this Z-Wave module can be set to respond to **ALL ON** and **ALL OFF** commands in up to four different ways. Some controllers may not be able to change the response from its default setting. Please refer to your controller's instructions for information on whether or not it supports the configuration function and if so, how to change this setting.

#### **The four possible responses are:**

1. It will respond to **ALL ON** and the **ALL OFF** commands (default).
2. It will not respond to **ALL ON** or **ALL OFF** commands.
3. It will respond to the **ALL OFF** command but will not respond to the **ALL ON** command.
4. It will respond to the **ALL ON** command but will not respond to the **ALL OFF** command.

#### **Invert Switch**

If the switch is accidentally installed upside down with "On" at the bottom and "Off" at the top, the default On/Off rocker settings can be reversed by changing parameter 4's value to "1".

- Parameter No: 4
- Length: 1 Byte
- Valid Values = 0 or 1 (default 0)

#### **Dim Rate Adjustments**

Both the number of steps (or levels) that the dimmer will change and the timing of the steps can be modified to suit personal preferences. The timing of the steps can be adjusted in 10 millisecond intervals.

##### **1. When Receiving a Z-Wave Dim Command**

- Parameter 7 (number of steps or levels)
- Parameter 8 (timing of the steps)
- Length: 2 Byte
- Valid Values:

Parameter 7 (default = 1) Valid Values: 1-99

Parameter 8 (default = 3) Valid Values: 1-255

##### **2. Manual Control Dimming (pressing the Dimmer's rocker)**

- Parameter 9 (number of steps or levels)
- Parameter 10 (timing of the steps)
- Length: 2 Byte
- Valid Values:

Parameter 9 (default = 1) Valid Values: 1-99

Parameter 10 (default = 3) Valid Values: 1-255

##### **3. When Receiving an All-On or All-Off Command**

- Parameter 11 (number of steps or levels)
- Parameter 12 (timing of the steps)
- Length: 2 Byte
- Valid Values:

Parameter 11 (default = 1) Valid Values: 1-99

Parameter 12 (default = 3) Valid Values: 1-255

### **Z-Wave Plus Interoperability Statement**

This product can be included and operated in any Z-Wave network with other Z-Wave certified devices from other manufacturers and/or other applications. All non-battery operated nodes within the network will act as repeaters regardless of vendor to increase reliability of the network.

### **Z-Wave Association Statement**

- This device supports Association Command Class (3 Groups)
- Association Group 1 supports Lifeline, Binary Switch Report
- Association Group 2 supports Basic Set and is controlled with the local load
- Association Group 3 supports Basic Set and is controlled by double pressing the On or Off button
- Each Association Group supports 5 total nodes

### **Factory Reset**

Quickly press ON (top) button 3 times then immediately press the OFF button 3 times. The LED will flash ON/OFF 5 times when completed successfully.