


Installing the GB10A Sensor

- Peel off the paper from the double sided tape on the back and attach the Sensor to the inside of a window that you want to protect.
- Slide the battery compartment off and install two AAA alkaline batteries, observing polarity. Set the switch to 2 to make the unit more sensitive to vibration, or 1 for less sensitive (helps prevent false alarms)

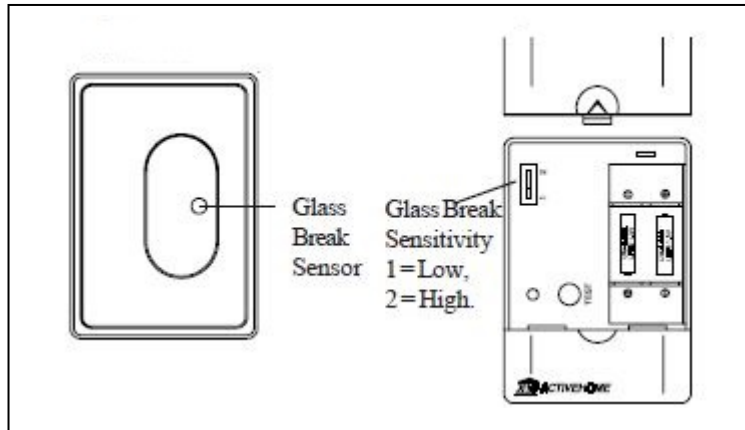

Registering the GB10A Sensor with the Security Console

- Set the slide switch on the Security Console to INSTALL.
- Press the TEST button on the GB10A Sensor. The console beeps once to confirm and the next available zone LED lights.
- Return the console slide switch to the RUN1 or RUN2 position.

Testing the GB10A Sensor

- Set the slide switch on the Security Console to RUN2.
- Press TEST on the GB10A. The console beeps to acknowledge and the zone LED lights.

*Note: you can install a total of 16 zones in the Console. This can be a combination of Door/Window Sensors, Motion Detectors, and Glass Break Sensors. See your Security System Owner's Manual for more information.

Operation

The GB10A is sensitive to vibration. When the security system is armed, the vibration caused by breaking glass will set off the alarm. You can test this by tapping on the window that the GB10A is attached to.

Replacing batteries

Open the battery compartment and replace the batteries with two AAA alkaline batteries. After replacing the batteries, the following steps are necessary to determine that the Console still recognizes the GB10A.

- Place the Console's slide switch to RUN2.
- Press TEST on the GB10A. If the Console chimes, it recognizes the GB10A and no further action is necessary.

If the Console did not chime:

Place the Console's slide switch to INSTALL. Press TEST on the GB10A. The Console beeps and logs in the GB10A to the next available zone. To make sure the Console logs the GB10A back into the same zone it was allocated to before you changed the batteries, wait 4 hours after removing the old batteries before reinstalling (until the zone indicator on the Console starts flashing).

FCC Statement

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

NOTE: NO CHANGES OR MODIFICATIONS MAY BE MADE TO THE UNITS. ANY CHANGES MADE TO THE UNITS WILL VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

120 DAY LIMITED WARRANTY x10pro-usa.com (X10PRO-USA), a division of Authinx Inc., warrants this product to be free from defective material and workmanship for a period of 120 days from the original date of purchase at retail. X10PRO-USA agrees to repair or replace, at its sole discretion, a defective product if returned to X10PRO-USA within the warranty period and with proof of purchase. If service is required under this warranty:

Call 1-888-384-0969, visit www.x10pro-usa.com, or email support@x10pro-usa.com



The X10 Supervised Security System includes a Security Console with an automatic dialer that calls friends or relatives in the event of a break in. Accessories include battery powered Radio Frequency (RF) Door/Window Sensors, battery powered RF Motion Detectors, battery powered RF Water Level Detectors, and RF Keyfob Remote Controls for arming and disarming the system. All sensors and remotes incorporate random digital security coding.

The system can be configured with any combination of the following items:

- Up to 16* Wireless Keyfob Security Remotes with arm/disarm and panic functions, and buttons to control security lights in and around the home.
- Up to 16* Wireless Water Level Detectors.
- Up to 30* magnetic switch operated Wireless Door/Window Sensors.
- Up to 30* Wireless PIR Motion Detectors.
- Optional X10 Home Automation modules such as plug-in lamp and appliance modules and wired-in replacement wall switches can be added to the system.

The Owner's Manual for the Security System describes the full installation process for the Security System, and should be referred to in addition to these instructions.

**Note: Door/Window Sensors, and Motion Detectors, may be added in any combination up to a total of 30, e.g. 15 Door/Window Sensors and 15 Motion Detectors, or any combination up to a total of 30. There are also 2 hard wired inputs, which are zones 31 and 32. Keyfob Security Remotes and Water Level Detectors can be added in any combination up to a total of 16, e.g. 8 Keyfobs and 8 Water Level Detectors*